


IP2 Series.

Industrial Performance Line.

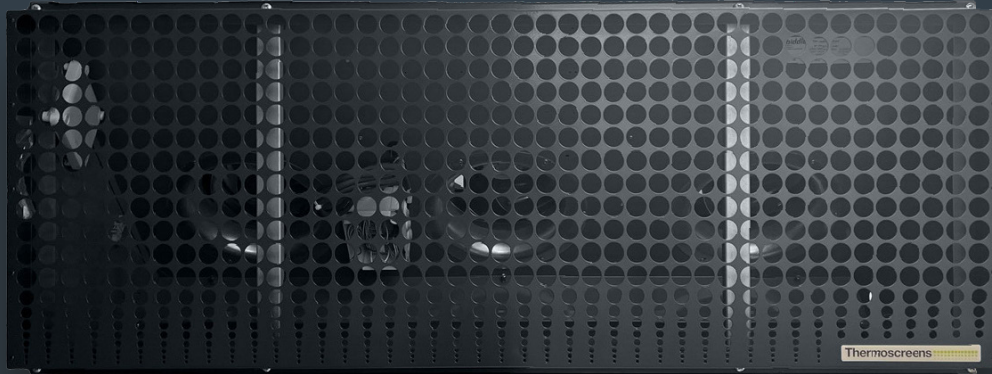

IP2 air curtains combine highly efficient climate separation with sturdy design and technical innovation to deliver outstanding energy savings with minimal maintenance.

For maximum efficiency, our IP2 unit can be controlled via a contact switch. Whenever the door is opened the air curtain is activated and the thermal output increases. When the door is closed the air flow speed automatically decreases and thermal output stops. A time delay switch allows deactivation to set based on how frequently the door is used.

Sizes (Width) (Joining kits available)

IP2 S - 1.5m, 2m, 2.5m
IP2 L - 1.5m, 2.25m

Mounting Height

Max. doorway height:
IP2 S - 3-6M
IP2 L - 5-8M
Max. doorway width:
IP2 S - 5M
IP2 L - 8M

Colour

Standard RAL 9016

Warranty

2 years

Key features.



Water



Ambient



Energy Savings



ErP compliant



Custom Paint



Electric

- Available as horizontal and vertical mounted units
- Ecopower Airflow Technology
- Controller with 5 settings
- Patented Side Guard Technology
- Pressure chamber system for increased air speed and distribution
- Axial fans for improved airflow and reduced power consumption
- IP21 Rated
- Easy to maintain
- 5 years warranty
- Door switch to maximise efficiency
- S and L models available - L model is ideal for applications with larger mounting heights
- 1 and 2 row coil options





www.thermoscreens.com

IP2 S Surface Mounted							
Model	Dimensions (L x W x D) (mm)	Electrical Supply (V/ph/Hz)	Loading Per phase (A)	Heat Output (kw)	Max air volume (m3/h)	Weight (kg)	Noise Level Min - Max dB(A) @5m
Water 1 row 80/60							
IP2S-150-W	1500 x 938 x 583	230/1/50	3	13.3-30.6	1500-6738	92	24-60
IP2S-200-W	2000 x 938 x 583	230/1/50	4	18.9-44.4	2008-8984	118	25-61
IP2S-250-W	2500 x 938 x 583	230/1/50	5	24.5-58.2	2510-11230	144	26-62
Water 2 row 60/40							
IP2S-150-W	1500 x 938 x 583	230/1/50	3	14.0-35.0	1500-6738	95	24-60
IP2S-200-W	2000 x 938 x 583	230/1/50	4	20.1-50.8	2008-8984	123	25-61
IP2S-250-W	2500 x 938 x 583	230/1/50	5	26.1-67.2	2510-11230	150	26-62
Electric							
IP2S-150-E	1500 x 938 x 583	400/3/50	3	14.8-44.5	1506-6738	119	24-60
IP2S-200-E	2000 x 938 x 583	400/03/50	4	20.0- 59.9	2008-8984	154	24-60
Ambient							
IP2S-150-A	1500 x 938 x 583	230/1/50	3	-	1506-6738	78	24-60
IP2S-200-A	2000 x 938 x 808	230/1/50	4	-	2008-8984	100	25-61
IP2S-250-A	2500 x 938 x 583	230/1/50	5	-	2510-11230	123	26-62

IP2 L Surface Mounted							
Model	Dimensions (L x W x D) (mm)	Electrical Supply (V/ph/Hz)	Loading Per phase (A)	Heat Output (kw)	Max air volume (m3/h)	Weight (kg)	Noise Level Min - Max dB(A) @5m
Water 1 row 80/60							
IP2L-150-W	1500 x 1264 x 808	230/1/50	3.1	24.7-54.6	3198-14356	201	38-69
IP2L-225-W	2250 x 1264 x 808	230/1/50	4.6	40.5-91.9	4797-21534	277	40-70
Water 2 row 60/40							
IP2L-150-W	1500 x 1264 x 808	230/1/50	3.1	23.8-53.8	3198-14356	207	38-69
IP2L-225-W	2250 x 1264 x 808	230/1/50	4.6	41.1-97.4	4797-21534	286	40-70
Ambient							
IP2L-150-A	1500 x 1264 x 808	230/1/50	3.1	-	3198-14356	190	38-69
IP2L-225-A	2250 x 1264 x 808	230/1/50	4.6	-	4797-21534	249	40-70


IP2 Series.
Horizontal Installation.

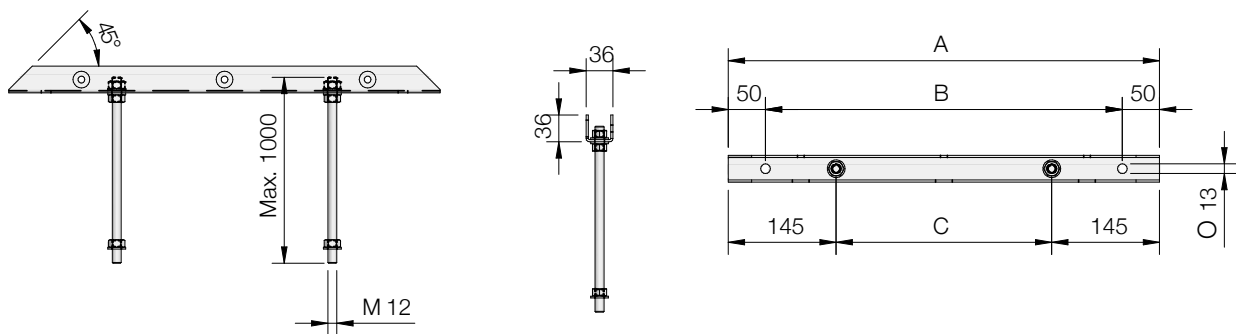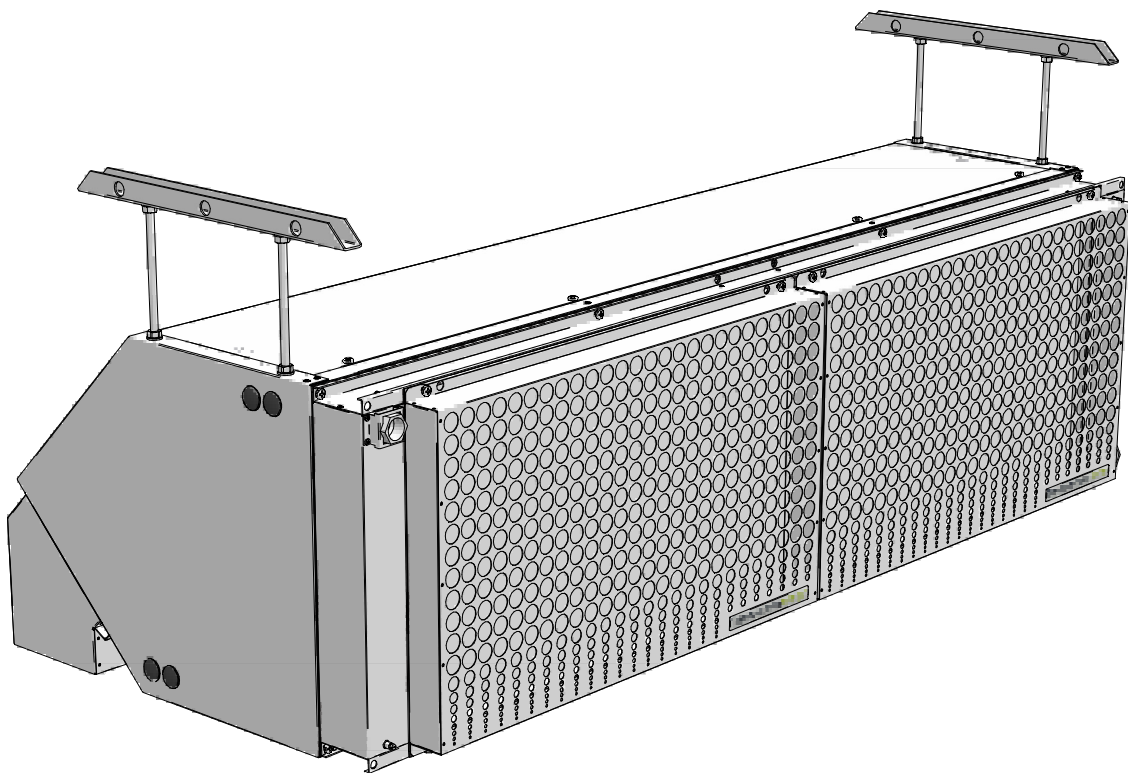

	A	B	C
IP2S 150(mm)	580	480	290
IP2L 150(mm)	740	640	450

Accessories	Part no.
Two suspension brackets (horizontal units only)	xxx
Two coupling plates (vertical basic units only)	xxx
Wall bracket (vertical basic units only)	xxx
Additional Components Needed	
Touch Controller	xxx
Wall Controller	xxx
Base plate (for vertical installation)	xxx
Optional	
Filter module - for IP2S	xxx
Flanges	xxx
Side shields	xxx

Index: The dimensions above display the installation components of the IP2. The horizontally mounted unit dimensions above display the measurements of the hanging bracket.

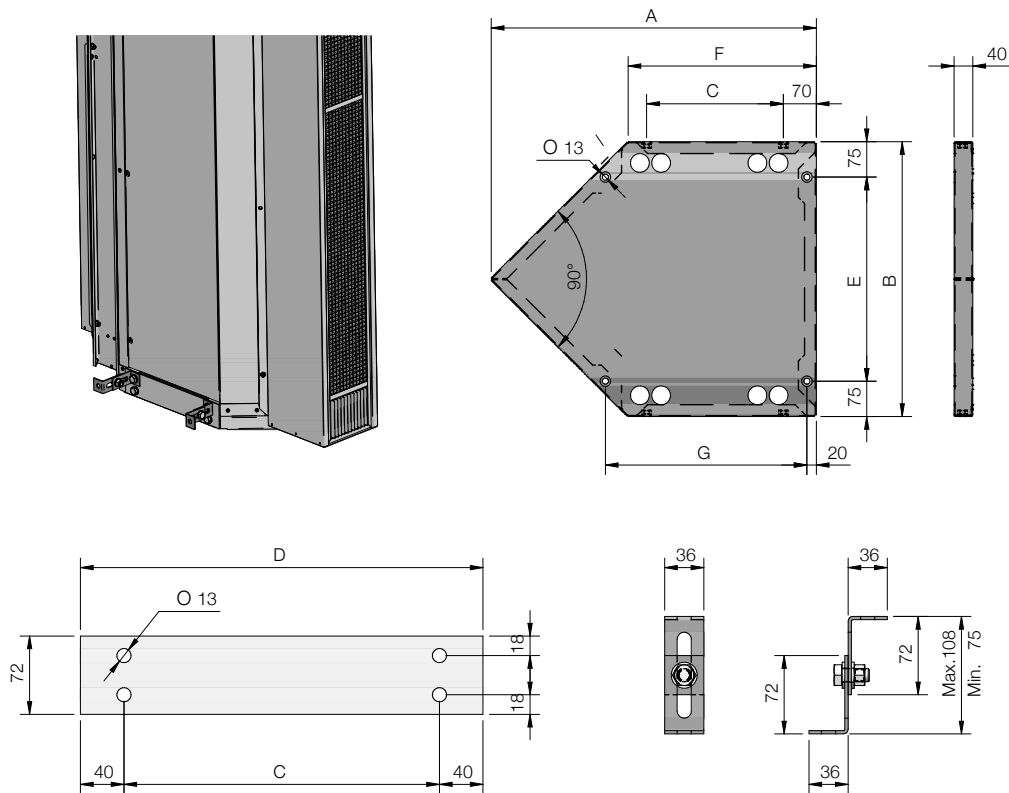

	A	B	C	D	E	F	G
IP2S 150 (mm)	690	583	290	370	433	400	427
IP2L 150 (mm)	963	808	450	530	658	560	588

Index: The dimensions above display the installation components of the IP2. The vertically mounted unit dimensions above display the measurements of the base plate.

Your environment is our expertise.

Thermoscreens were one of the pioneers of modern air curtain technology, and we remain at the forefront of its evolution today. Our sales team work hand-in-hand with an international network of distributors, providing solutions to customers of all types and sizes, in more than 50 countries. Across the globe, our name is synonymous with the highest quality standards; our products renowned for their energy efficiency, reliability and ease of use.

